



Suporte de Barramento BT, em poliéster, uso Interior
 LV polyester busbar support insulator, indoor use
 Aislador soporte de barramiento BT, en poliéster, uso Interior

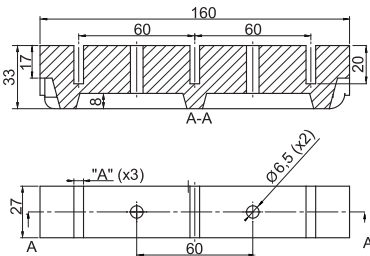

Modelo / Model / Modelo	PB 02
<p style="text-align: center;">AFFORDABLE SOLUTIONS FOR L.V. APPLICATIONS</p> <p style="font-size: 2em; font-weight: bold; text-align: center;">B.M.C. / S.M.C.</p>	
Barramento / Busbar / Barramiento	03 Barras / Bars / Barras
Umáx. / Um / Umax. (kV)	0,75
Tensão Sup. / Rated Pow. Freq. / Ens. Dielec. (kV)	10
Massa / Mass / Masa (kg)	0,191
Temp. Trab. / Work Temp. / Temp. Trab. (°C)	-20 até/ up to / hasta +75°C
Cor / Color / Cor	Laranja/Orange/Naranja RAL 2004
Tração / Tensile / Traccion (N)	4.400
Dimensões / Dimensions / Dimensiones (mm)	 <p style="margin-left: 40px;">"A" = 3/16" 5mm 1/4" 3/8"</p>