
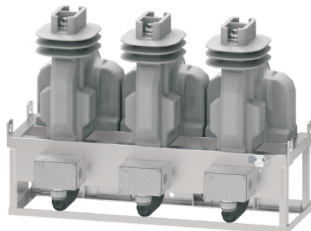

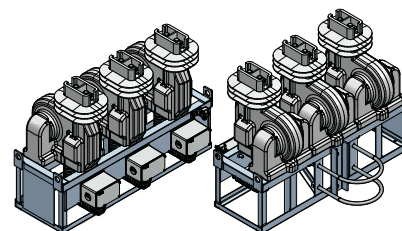




| Model | | SYSTRAFO - C 24KV | | | | | | | | | |
|-----------------------------|---------|---|------|----------|-----|------------------------------|--|-----------------|-----|----------|-----|
| | |  | | | | | | | | | |
| | | IEEE / ANSI | | | | IEC | | | | | |
| Maximum Voltage | (kV) | Up to 25,5 | | | | Up to 24 | | | | | |
| Rated Power Frequency | (kV) | Up to 50 | | | | Up to 50 | | | | | |
| Basic Impulse Level | (kV) | Up to 150 | | | | Up to 150 | | | | | |
| Short Time Thermal | (x In.) | 80 - Ip Up to 600 A | | | | | | | | | |
| Mass | (kg.) | 300 | | | | | | | | | |
| Thermal Rating Factor | (x In.) | 1,2 (1.5 On Request) | | | | | | | | | |
| Frequency | (Hz) | 60 (50 On Request) | | | | | | | | | |
| Installation | | Outdoor | | | | | | | | | |
| Rated Secondary Current. | (A) | 5A (1A On Request) | | | | | | | | | |
| Color | | Grey RAL 7030 | | | | | | | | | |
| Out Put | (VA) | 400 | | | | | | | | | |
| Type of Connection | | (H2 Solidly Grounded) 1,2xUn-Cont / 1,5xUn-30s | | | | | | | | | |
| Standard | | IEEE / ANSI (n) | | IEC (VA) | | VT Ratio | | IEEE / ANSI (n) | | IEC (VA) | |
| | | CT | | CT | | | | VT | | VT | |
| Burden | | B0,1 | B0,2 | 2,5 | 5,0 | | | W | X | 10 | 20 |
| • Rated Primary Current (A) | 5 | 0,3 | 0,3 | 0,2 | 0,2 | 23000:R3-115V - Rn: 120:1 | | 0,3 | 0,3 | 0,2 | 0,2 |
| | 10 | 0,3 | 0,3 | 0,2 | 0,2 | 23000:R3-115:R3V - Rn: 200:1 | | 0,3 | 0,3 | 0,2 | 0,2 |
| | 15 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 20 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 25 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 30 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 40 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 50 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 60 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 75 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 100 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 150 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 200 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 250 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 300 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 350 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 400 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 450 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 500 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 550 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | 600 | 0,3 | 0,3 | 0,2 | 0,2 | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

Dimensions (mm)



The surge arrester are special accessories.
If you need it please request in the order.

Basic version contains:

- 3 encapsulated CT's and 3 VT's;
- Secondary box for each Pole;
- 1 Post fixing Device – Distribution standard.

Optional Accessories:

- Connecting cables (Aluminum) XLPE insulation;
- Sealed Box for Electronic Equipment Assembling;
 - 1 measuring block;
 - Door lock type slit;
 - T-Style door knob;
 - T-Style door knob with key;
 - Presence sensor.