
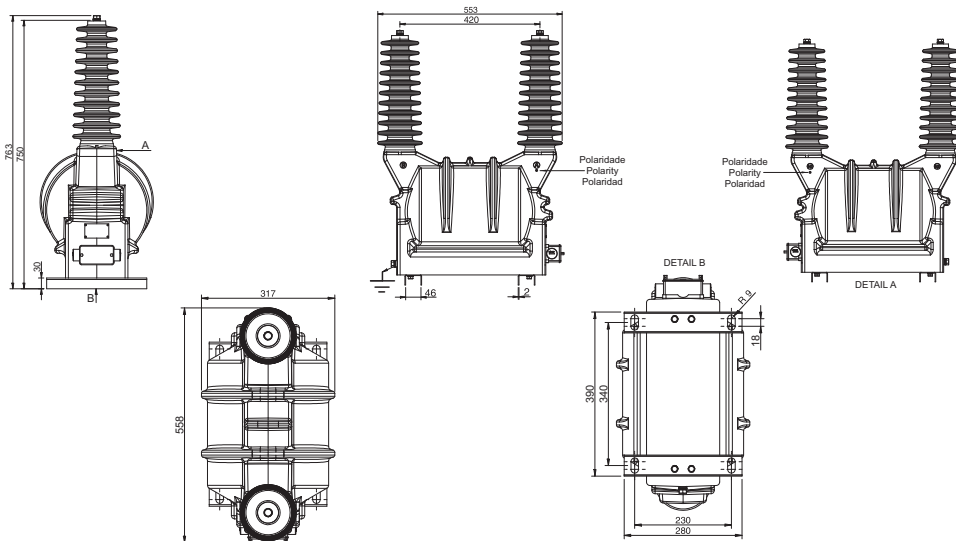


Model		BDEC - FF26S	
Voltage Transformers Phase - Phase			
		IEEE / ANSI	IEC
Maximum Voltage	(kV.)	Up to 36	Up to 36
Rated Power Frequency	(kV.)	Up to 70	Up to 70
Basic Impulse Level	(kV.)	Up to 170	Up to 170
Voltage Factor	(ver nota -)	1,1 Cont.	1,2 Cont.
Mass	(Kg.)	90	
Out Put	(VA)	500	
Accuracy	(ABNT)	0,3P25 / 0,6P75 / 1,2P200	
Accuracy	(ANSI)	0,3X / 0,6Y / 1,2Z	
Accuracy	(IEC)	15VA CL0,2 / 50VA CL0,5 / 200VA CL1,0	
Frequency	(Hz)	60Hz (50Hz Upon Request)	
Number of Terminals		6	
Primary Voltage	(V)	25000 Up to 34500V	
Secondary Voltage	(V)	110 Up to 220	

Dimensions (mm)



OTHERS OVER VOLTAGES VALUES UNDER CONSULT